


## Lifting stati. Aqualift F XL 300l Duo, SPF 5500-S3, Cast-iron gate valve

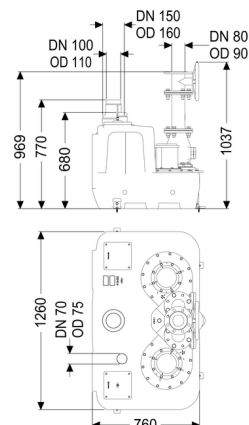

### Article information

Item no.: 11080  
 GTIN: 4026092057476  
 Price group: 50

### Advantages

- Different performance classes available
- Pressure sensor for reliable pneumatic level measurement
- Maximum operating reliability due to intelligent control unit (Duo)

### Description

The lifting station for faecal and faecal-free wastewater is equipped with a submersible pump and a backflow preventer. The collection tank made of permanently resistant polymer (PE) offers universal connection options and has a screwed access cover.

The station is controlled by a user-friendly control unit, which can be optionally integrated in the building management system via a potential-free contact or alarm and collective fault messages can be output via a GSM interface (Comfort control unit).

Type of wastewater:

wastewater with sewage

Installation situation:

free-standing set-up

### Version:

Type of system:

Twin pump station

Shut-off valve:

Shut-off valve made of cast iron

Pump control:

Control unit

Backflow preventer:

integrated

Sound absorption mat:

yes

Delivery state:

Installation-ready (electrical components,  
connection parts must be connected on site)

### General characteristics:

Colour: black  
Standard: EN 12050-1

### Dimensions:

Length: 1,260 mm  
Width: 889 mm  
Height: 1,042 mm

### Tank:

Number of inlets: 1 ST  
Inlet nominal size (DN): 100  
Inlet nominal size (OD): 110 mm  
Inlet max. scoring (DN): 200 mm  
Connection for manual diaphragm pump (DN): 32  
Tank volume: 300 l  
Pumping volume: 175 l  
Pressure pipe connection: vertical  
Pressure pipe connection (DN): 80 mm  
Pressure pipe connection (OD): 90 mm  
Venting connection (DN): 70 mm

### Pumping device:

Pump: SPF 5500  
Number of pumps: 2  
Max. pumping capacity: 60 m<sup>3</sup>/h  
Max. pumping height: 28 m  
Operating mode: S3 - 30 %  
Power P1: 5.7 kW  
Power P2: 4.8 kW  
Speed: 2,800 U/min  
Max. temperature (permanent) of conveyed material: 40 °C  
Connection type: Direct connection  
Weight: 38 kg  
Impeller type: Multi-vane impeller  
Length of mains cable for pump: 5 m  
Rated current: 9.1 A  
Protection class (pump): IP 68 (3m/48h)  
Protection class: I

Type of pump connection cable:	H07RN8-F 6G 1 mm <sup>2</sup>
Temperature monitoring:	integrated
Insulation class:	F

#### **Control:**

Control unit:	Comfort
Operating voltage:	400 V
Mains frequency:	50 Hz
Self-diagnosis system (SDS):	yes
Battery buffering:	yes
Multi-line display:	yes
Log book function:	yes
GSM interface:	yes
Potential-free contact:	yes
Type of fuse required (electrical protection):	3 x C 32 A
Motor protection switch:	yes
Protection class control unit:	IP 54
Length of mains cable for control unit:	0 m
Type of level measurement:	pneumatic
Level measurement instrument:	Immersion pipe
Alarm sensor:	Immersion pipe