


Shower channel Linearis Compact L: 550 mm, DN 50, enclWPM, 304 SST cov., K 3

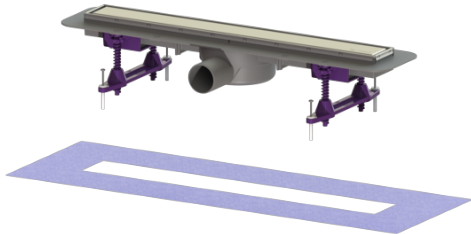

Article information

Item no.: 45600.61
 GTIN: 4026092048177
 Price group: 10

Advantages

- Individual design with reversible stainless steel insert
- Highest fire protection standards
- Low installation depth

Description

The Linearis Compact shower channel with welded on drain body made of ABS is suitable for indoor linear drainage. If inserted upside down, the stainless steel insert can be tiled individually. Including prepared seepage water openings and odour trap.

Version:

System:	125
Odour trap:	included
Type of waterproofing layer:	Waterproofing layer
Seepage opening:	prepared
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Water exposure class in accordance to DIN 18534-1 (up to and including):	W2-I
Sealing water height:	22 mm

General characteristics:

Nominal size (DN):	50
Outer diameter (OD):	50

Dimensions:

Width:	191 mm
Height:	80 mm

null: 615 mm

Tank:

Number of outlets: 1 ST
Installation depth: 80 mm

Drain body:

Material of drain body: ABS

Coverage features:

Type of cover: Stainless steel cover
Grating design: optionally tileable
Cover material: 304 stainless steel
Colour of cover: silver, selectable
Max. flooring height: 15 mm
Load class: K 3 (EN 1253-1)
Surface: Brushed SST
Locking: placed

Grating:

Rim length: 550 mm
Rim width: 66 mm
Rim material: 304 stainless steel

Shape of upper section: square
Upper section material: ABS
Discharge rate (l/s) with 10 mm backwater: 0.6 l/s
Discharge rate (l/s) with 20 mm backwater: 0.7 l/s
Discharge rate (l/s) without backwater: 0.5 l/s