


Ferrofix drain body Sys 125, DN 70, Horizontal outlet

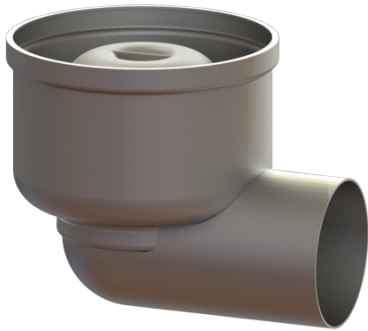

Article information

Item no.: 54400
GTIN: 4026092053614
Price group: 70

Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel
- Variably combinable with upper sections

Description

In combination with a System 125 upper section, the Ferrofix stainless steel drain body is used for point drainage and is equipped with a removable odour trap and a temporary protective cover.

The outlet socket is suitable for connection to SML cast iron pipes.

Version:

| | |
|--|-------------------|
| System: | 125 |
| Odour trap: | included |
| Waterproofing layer on the drain body: | Connection flange |
| Sealing water height: | 50 mm |

General characteristics:

| | |
|----------------------|-----------|
| Nominal size (DN): | 70 |
| Outer diameter (OD): | 78 |
| Standard: | EN 1253-1 |

Dimensions:

| | |
|---------|--------|
| Length: | 181 mm |
| Width: | 142 mm |
| Height: | 145 mm |

Tank:

Number of outlets: 1 ST

Drain body:

Material of drain body: Stainless steel 14301
Socket version: lateral