


## Ferrofix upper section Sys 125, Gl fl., Slotted grating, 146x146 mm

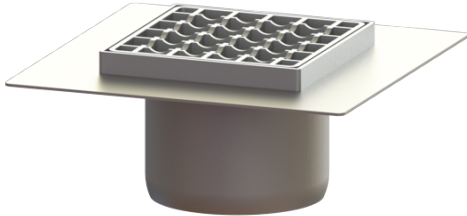

### Article information

Item no.: 54915  
GTIN: 4026092072462  
Price group: 70

### Advantages

- Made of a particularly hygienic and mechanically highly resistant stainless steel
- Multiple combinations with suitable drain bodies

### Description

Used in combination with a drain body of the KESSEL modular system 125, the stainless steel upper section is suitable for indoor point drainage.

### Version:

System:	125
Type of waterproofing layer:	Waterproofing layer
Waterproofing layer on the upper section:	Adhesive flange (suitable for moisture barriers)

### Dimensions:

Length:	246 mm
Width:	246 mm
Height:	100 mm

### Coverage features:

Type of cover:	Slotted grating
Cover material:	304 stainless steel
Load class:	L 15 / M 125 (EN 1253-1)
Height:	15 mm
Surface:	pickled
Locking:	unlocked
Mesh size:	23 x 23 mm

### Grating:

Rim length:	146 mm
Rim width:	146 mm
Upper section material:	304 stainless steel