


## Ferrofix renovation drain DN 50, horizontal, Slot grt, K 3

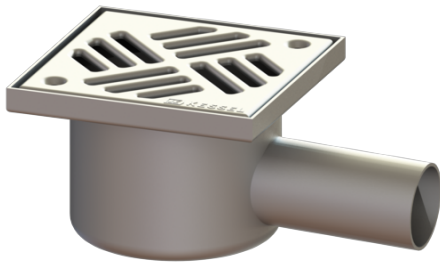

### Article information

Item no.: 59325  
GTIN: 4026092103036  
Price group: 70

### Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel
- ideal for the food industry
- catering kitchens and swimming pools
- Including odour trap

### Description

The Ferrofix stainless steel renovation drain is equipped with a horizontal outlet DN 50 as well as a removable odour trap.

#### Version:

System:	125
Odour trap:	included
Waterproofing layer on the upper section:	Connection flange
Sealing water height:	50 mm

#### General characteristics:

Nominal size (DN):	50
Outer diameter (OD):	50

#### Dimensions:

Length:	223 mm
Width:	148 mm
Height:	100 mm
Max. design height:	100 mm

#### Tank:

Number of outlets:	1 ST
--------------------	------

**Drain body:**

Material of drain body: Stainless steel 14301  
Socket version: lateral

**Coverage features:**

Type of cover: Slotted cover  
Cover material: 304 stainless steel  
Load class: K 3 (EN 1253-1)  
Length: 138 mm  
Width: 138 mm  
Locking: screwed

**Grating:**

Rim length: 148 mm  
Rim width: 148 mm

Upper section material: Stainless steel 14301  
Discharge rate (l/s) with 20 mm backwater: 0.8 l/s