


## Replacement pump, Minilift F with seal monitoring

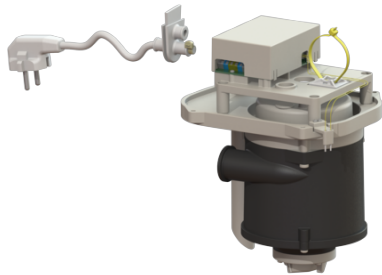

### Article information

Item no.: 680546  
GTIN: 4026092075111  
Price group: 90

### Description

Replacement pump for Minilift F

#### Pumping device:

Number of pumps:	1
Max. pumping height:	6.4 m
Operating voltage:	230 V
Mains frequency:	50 Hz
Operating mode:	S3 - 30 %
Power P1:	0.65 kW
Power P2:	0.35 kW
Speed:	2,900 U/min
Max. temperature (permanent) of conveyed material:	35 °C
Connection type:	Schuko (earthed contact) 2-pin
Impeller type:	Macerator
Length of mains cable for pump:	1.6 m
Rated current:	2.8 A
Type of pump connection cable:	H03 VV-F 3G 0.75 mm <sup>2</sup>
Temperature monitoring:	integrated