


Staufix clean out DN 200, Floor slab, tileable

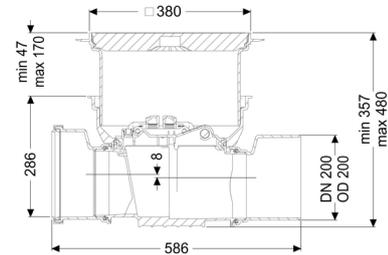

Article information

Item no.: 700200.10X
 GTIN: 4026092075999
 Price group: 10

Advantages

- Simple conversion to Staufix type 1
- Type 2 or StaufixControl
- Fast
- toolless access for cleaning
- Own gradient only 8 mm

Description

The clean out for faecal-free wastewater makes easy access to wastewater pipes possible for inspection and maintenance work.

Thanks to the modular KESSEL system, existing systems can easily be supplemented by up to two flaps and one emergency closure or be converted to the StaufixControl backwater valve.

Type of wastewater:

wastewater without sewage

Installation situation:

floor slab installation

Version:

Type of waterproofing layer:

Waterproofing layer

Delivery state:

Installation-ready (connection parts must be connected on site)

General characteristics:

Nominal size (DN):

200

Outer diameter (OD):

200

Note on nominal size:

Hydraulics correspond to DN 150

Colour: black

Dimensions:

Length: 586 mm
Width: 444 mm
Cutout dimension, length: 750 mm
Cutout dimension, width: 750 mm

Tank:

Installation depth: 341 - 464 mm
Groundwater resistant from lower edge of base section: 3.000 mm
Vertical adjustment: vertically adjustable upper section

Coverage features:

Type of cover: tileable cover plate
Cover material: Polymer
Max. flooring height: 18 mm
Load class: K 3 (EN 1253-1)
Length: 366 mm
Width: 366 mm
Tightness: surface water resistant
Locking: Lock & Lift
Vertical drop between inlet and outlet: 8 mm