


## Kit Aquapump Retrofit Duo, GTF2600-S1, level sensor

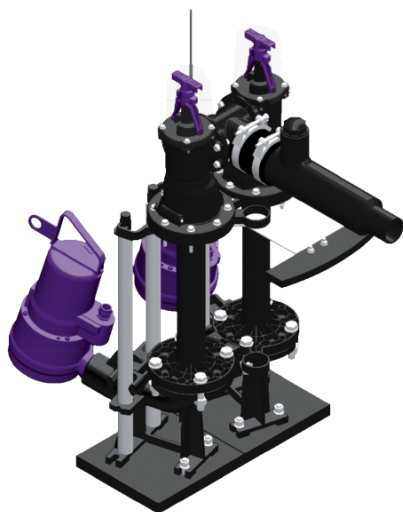

### Article information

Item no.: GTF2600-D  
 GTIN: 4026092104071  
 Price group: 60

### Description

Type of wastewater:	wastewater without sewage
Installation situation:	installation in on-site collecting tank

### Version:

Type of system:	Twin pump station
Shut-off valve:	yes
Pump control:	Control unit
Backflow preventer:	integrated
Delivery state:	Modular set for assembly on site

### General characteristics:

Standard:	EN 12050-2
-----------	------------

### Tank:

Pressure pipe connection:	horizontal
Pressure pipe connection (DN):	50 mm
Pressure pipe connection (OD):	63 mm

### Pumping device:

Pump:	GTF 2600
-------	----------

Number of pumps:	2
Max. pumping capacity:	46 m <sup>3</sup> /h
Max. pumping height:	13.6 m
Operating voltage:	400 V
Mains frequency:	50 Hz
Operating mode:	S1
Power P1:	2.6 kW
Power P2:	2.1 kW
Speed:	2,900 U/min
Type of fuse required (electrical protection):	3 x C 20 A
Max. temperature (permanent) of conveyed material:	40 °C
Connection type:	coded plug
Weight:	12 kg
Impeller type:	Multi-vane impeller
Length of mains cable for pump:	10 m
Rated current:	4.5 A
Protection class (pump):	IP 68 (3m)
Protection class:	I
Type of pump connection cable:	H07RN-F 7G 1.5 mm <sup>2</sup>
Temperature monitoring:	integrated

#### Control:

Control unit:	Comfort
Operating voltage:	400 V
Mains frequency:	50 Hz
Self-diagnosis system (SDS):	yes
Battery buffering:	yes
Multi-line display:	yes
Log book function:	yes
USB interface:	yes
GSM interface:	yes
Potential-free contact:	optional
Type of fuse required (electrical protection):	3 x C 20 A
Protection class control unit:	IP 54
Type of level measurement:	hydrostatic
Level measurement instrument:	Level sensor
Alarm sensor:	Level sensor