

## Submersible pump *Aquadive GTF 500 / GTF 500 resistant* for wastewater without sewage




With / without float switch, with integrated low-intake, removable suction basket and convenient transport handle, connection to pressure pipe 1 1/4 inch vertical


**Cable length:** 10 m

**GTF 500 resistant:**

Resistant against aggressive wastewater containing salts, condensates and effluent from water softening systems.



### Pumping capacity

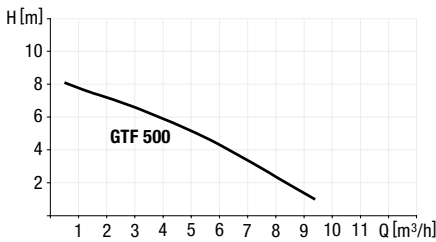

### Pump type

Pump type	Current type	Voltage	Current	Power (P1/P2)	RPM	Motor protection	Plug	Pumping capacity	Pumping height
GTF 500-S1*	Alternating current	230 V	2.7 A	600 W / 360 W	2.800 min <sup>-1</sup>	integrated	coded plug	10 m <sup>3</sup> /h	8 m
GTF 500-S1 resistant*	Alternating current	230 V	2.7 A	600 W / 360 W	2.800 min <sup>-1</sup>	integrated	Schuko	10 m <sup>3</sup> /h	8 m

\* Definition of S1-pumps see page 101

### GTF 500

Pressure connection	Art. no.
Without float switch	
1 1/4 inch	280 710
With float switch	
1 1/4 inch	280 810

### GTF 500 resistant

Pressure connection	Art. no.
Without float switch	
1 1/4 inch	280 750
With float switch	
1 1/4 inch	280 850

## Submersible pump *Aquadive KTP 300 / KTP 300 resistant* for wastewater without sewage





With/without float switch, with backwater flap, pivotable connection to pressure pipe 1 inch side / vertical

**Cable length:** 10 m

**Note:** Removable input basket - can pump down to a level of 8 mm.

### Pumping capacity

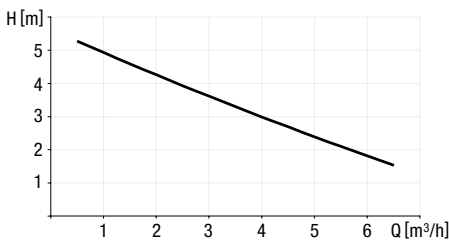

### Pump type

Pump type	Current type	Voltage	Current	Power (P1/P2)	RPM	Submersible depth	Motor protection	Plug	Pumping capacity	Pumping height
KTP 300-S1*	Alternating current	230 V	1.6 A	360 W / 210 W	2.800 min <sup>-1</sup>	max. 10 m	integrated	Schuko	8 m <sup>3</sup> /h	6 m
KTP 300-S1 resistant*	Alternating current	230 V	1.6 A	360 W / 210 W	2.800 min <sup>-1</sup>	max. 10 m	integrated	Schuko	8 m <sup>3</sup> /h	6 m

\* Definition of S1-pumps see page 101

### KTP 300

Pressure connection	Art. no.
Without float switch	
1 inch	28 740
With float switch	
1 inch	28 840

### KTP 300 resistant

Pressure connection	Art. no.
Without float switch	
1 inch	28 740C
With float switch	
1 inch	28 840C