



System 100

**Variofix shallow bed upper sections**  
with covers in stainless steel

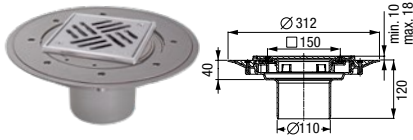


**with slotted cover**  
in stainless steel AISI 304

**Material:** ABS, rim in stainless steel  
**Class:** K 3  
**Tile thickness:** 8 - 16 mm  
**Cover:** 138×138 mm, screwed  
**Inclusive:** Waterproofing membrane  
**Art. no.** 47 902

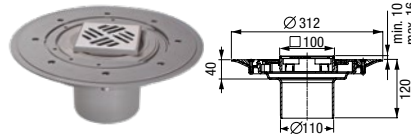

**with standard slotted cover**  
in stainless steel AISI 304

**Material:** ABS  
**Class:** K 3  
**Tile thickness:** 6 - 14 mm  
**Cover:** 95×95 mm  
**Inclusive:** Waterproofing membrane  
**Art. no.** 47 901

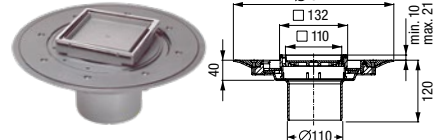

**with recessed polymer cover**  
for on-site tiling

**Material:** ABS, rim in stainless steel AISI 304  
**Class:** K 3  
**Tile thickness:** 10 mm  
**Cover:** 110×110 mm, with locking system  
**Inclusive:** Waterproofing membrane  
**Art. no.** 47 906


**Upper sections**

with covers in stainless steel and polymer



**with tileable cover**  
made of polymer

**Material:** ABS,  
rim in stainless steel / polymer  
**Class:** K 3  
**Cover:** 110×110 mm  
**Art. no.** 27 211, rim in stainless steel  
**Art. no.** 27 210, rim in polymer



**with slotted cover**  
in stainless steel AISI 304

**Material:** ABS  
**Class:** K 3  
**Cover:** 100×100 mm  
**Art. no.** 27 165



**with closed cover**  
in stainless steel AISI 304


**Material:** ABS,  
rim in stainless steel  
**Class:** L 15  
**Cover:** 150×150 mm, screwed  
**Inclusive:** Gasket  
**Art. no.** 27 166



**with slotted cover**  
made of polymer


**Material:** PP, with sealing flange  
**Class:** K 3  
**Tile thickness:** Use with 1 - 4 mm  
vinyl / synthetic flooring  
**Cover:** Ø 120 mm  
**Art. no.** 27 192

**Drain bodies *The Superflat* in PP**  
with removable odour trap




**Lateral outlet Ø 50,**  
**without lateral inlet**

**Sealing water height:** 30 mm  
**Drainage capacity:**  
0.8 l/sec with 20 mm threshold  
**Art. no.** 42 700



**Lateral outlet Ø 50,**  
**one lateral inlet Ø 40**

**Sealing water height:** 30 mm  
**Drainage capacity:**  
0.8 l/sec with 20 mm threshold  
**Art. no.** 42 701



**Lateral outlet Ø 50,**  
**three lateral inlets Ø 40**

**Sealing water height:** 30 mm  
**Drainage capacity:**  
0.8 l/sec with 20 mm threshold  
**Art. no.** 42 703

Suitable for  
this products  
↑ Accessories  
from page 206