
Catalogue EN 4.2 **KESSEL AG**

246 **4.2 Floor drains** System 125 **Accessories** Ecoguss and Practicus **Dimensions Flanges** in mm Art. no. Clip flange Compatibility: For combination with drain 280×280 44 703 bodies and extension sections; for floor drain *Ecoguss* and *Practicus* **Inclusive:** Factory-mounted waterproofing membrane in accordance with EN 1253-1 and DIN 18534-1-W3-I Ø 348 Glue flange 48 410 Compatibility: For combination with drain with counter flange bodies and extension sections; also for compound seal; for floor drain ${\it Ecoguss}$ and Practicus Material: ABS without connection Compatibility: For combination with drain Ø 268 48 409 Ø268 flange bodies and extension sections; for floor drain *Ecoguss* and *Practicus* Material: ABS **Pressure sealing** Compatibility: For combination with drain Ø 273 48 407 Ø 273 bodies and extension sections; for floor flange drain *Ecoguss* and *Practicus* Material: Stainless steel AISI 304 **Inclusive:** Seeping water opening Waterproofing membranes Art. no. Waterproofing membrane Compatibility: Art. no. 48 410 48 651 2 component adhesive **Compatibility:** For gluing of KESSEL waterproofing **Elastomer waterproofing** Compatibility: Art. no. 48 407 membrane Material: NBR



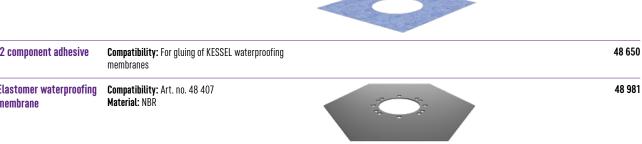

Extension section	ins		Art. no.
without lateral inlet	Compatibility: For floor drain <i>Ecoguss</i> and <i>Practicus</i> Material: PP Inclusive: Lip seal	Ø150 Ø125	48 987
with lateral inlet Ø 50	Compatibility: For floor drain <i>Ecoguss</i> and <i>Practicus</i> Material: PP Inclusive: Lip seal	Ø150 Ø125 158	48 989