
4.2 Floor drains 261

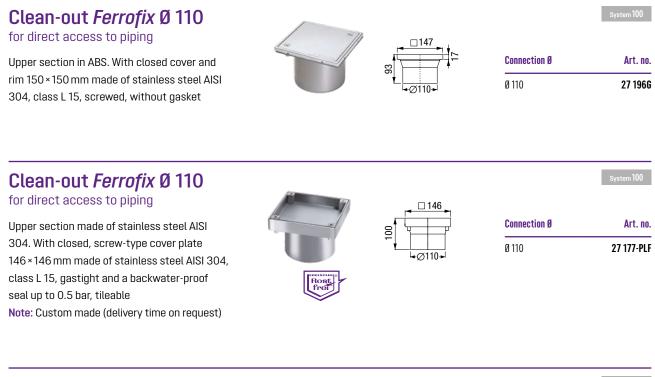

Clean-out Ferrofix Ø 110

for direct access to piping

Clean-out Ferrofix


Upper section made of stainless steel AISI 304. With closed, screw-type cover plate 146 × 146 mm made of stainless steel AISI 304, class L 15, screwed odour-tight, with gasket, with a backwater-proof seal up to 0.5 bar

Note: Custom made (delivery time on request)



s s
°, ⊷Ø110≁
₩ ₩

Connection Ø	Art. no	
Ø 110	27 177-PI	



Connection Ø	Art. no.
Ø 110	27 177-PLF-KF

with glue flange, for direct access to piping

Upper section made of stainless steel AISI 304, with closed, screw-type cover plate 146 × 146 mm made of stainless steel AISI 304, class L 15, screwed odour-tight, with gasket, gastight and a backwater-proof seal up to 0.5 bar, tileable

Note: Custom made (delivery time on request)

Clean-out Ferrofix

with glue flange, for direct access to piping

Upper section made of stainless steel AISI 304. With closed cover 146 × 146 mm made of stainless steel AISI 304, class L 15, screwed odour-tight, with gasket, with a backwaterproof seal up to 0.5 bar

Note: Custom made (delivery time on request)

