

Basement drain *Practicus*

For installation in a concrete floor / slab

Made in PP. With sludge trap, with lip seal and protective cover for use during construction. Drainage capacity in l/sec with 20 mm / 10 mm threshold 1.8 l/sec / 1.1 l/sec. Installation area:


lateral outlet: 220 × 180 mm
vertical outlet: 180 × 180 mm

With upper section in ABS

Cover:

Slotted cover 138 × 138 mm in ABS, black, class K 3

➤ **Accessories:** page 296 – 300

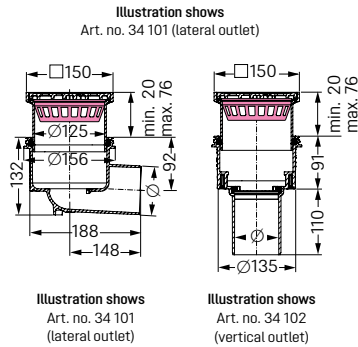

Outer diameter Ø (mm)	Art. no.
Lateral outlet	
Ø 110	34 101
Vertical outlet	
Ø 110	34 102

Basement drain


For installation in a concrete floor / slab

Made in PP. Lateral outlet 2.5°, with removable odour trap and sludge trap. Drainage capacity 1.6 l/sec flow rate. Installation area 220 × 280 mm
With upper section in PP

Cover:

Slotted cover 138 × 138 mm made in polymer, black, class K 3

➤ **Accessories:** page 296 – 300



Outer diameter Ø (mm)	Art. no.
Ø 110	36 501