

Grease separators *EasyClean* free Basic Standard NS 2 – 10

for free-standing installation



EN 1825 Z-54.1-474

Service side ... (left/right)
 Inspection window (with/without)
 Refill inlet (with/without)

The separator for grease contaminated wastewater is suitable for free-standing installation in frost protected areas and contains no metal parts in the chamber. The separator chamber made of resistant polymer (PE) includes an integrated sludge trap. Two odour-tight covers with quick-release closures allow easy access for cleaning and maintenance tasks. Requires disposal truck with vacuum system. The tank cover is opened during manual disposal.

Warranty for polyethylene material: 20 years

Standard: EN 1825

Connection of inlet/outlet fittings: PE-HD pipes according to DIN 19537, HT pipe according to DIN 19560 (PP or AS piping)

Delivery: System completely assembled.



➤ **Accessories:** Sampling chamber page 361

➤ **Technical note:** page 360



Illustration shows Art. no. 94 004.32R

NS	Direction of flow "left"	Direction of flow "right"
	Art. no.	Art. no.
Without accessories		
NS 2	94 002.10	94 002.10
NS 4	94 004.10	94 004.10
NS 7	94 007.10	94 007.10
NS 10	94 010.10	94 010.10
With inspection window		
NS 2	94 002.21L	94 002.21R
NS 4	94 004.21L	94 004.21R
NS 7	94 007.21L	94 007.21R
NS 10	94 010.21L	94 010.21R
With refill inlet		
NS 2	94 002.12L	94 002.12R
NS 4	94 004.12L	94 004.12R
NS 7	94 007.12L	94 007.12R
NS 10	94 010.12L	94 010.12R
With inspection window and refill inlet		
NS 2	94 002.32L	94 002.32R
NS 4	94 004.32L	94 004.32R
NS 7	94 007.32L	94 007.32R
NS 10	94 010.32L	94 010.32R

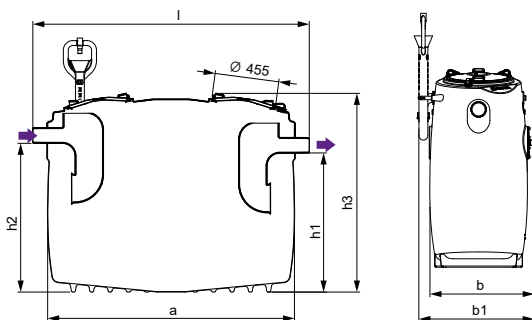

NS	Outer diameter Ø (mm)	Installation dimension l × b (mm)	b1 (mm)	h1 (mm)	h2 (mm)	h3 (mm)	Weight (kg)	Sludge trap (l)	Water and grease (l)	Grease storage (l)	Total (l)
2	110	1560 × 700	850	985	1055	1420	80	200	460	80	660
4	110	1960 × 700	850	985	1055	1420	100	400	420	160	820
7	160	1960 × 920	1080	1185	1255	1670	150	700	670	280	1370
10	160	2610 × 920	1080	1185	1255	1670	170	1000	880	400	1880

Ø = Outer diameter b1 = Set-up dimensions