

Grease separator *EasyClean free UnderSink* NS 0.7

for free-standing installation



The separator for greasy wastewater is suitable for free-standing set-up in frost-protected rooms below a sink and is manufactured without the need for metallic components in the tank. The collecting tank made of permanently resistant polymer (PP) is equipped with an integrated sludge trap. An odour-tight cover with all-round seal and clip closures makes easy access possible for cleaning and maintenance work. For easy removal, the separator has a quick-release connection to the pipe.

An inspection window for optional installation on site is available for visual checking of the grease layer thickness.

Technical data:



- Inlet/outlet Ø 50 mm
- Grease storage 8l
- Sludge trap 12l
- Total volume 33l

Material: PP

Delivery: Modular kit for assembly on site

Type of disposal: manual

NS	Art. no.
0.7	93 070.00US

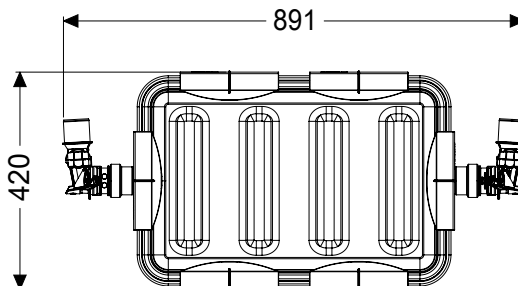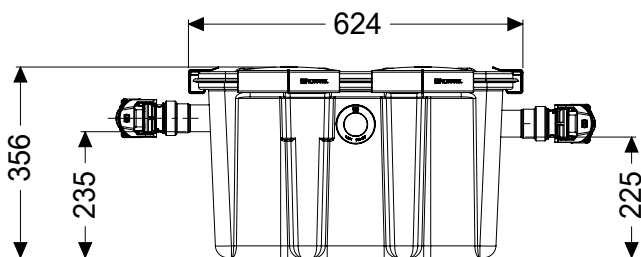

h1 (mm)	h2 (mm)	Inlet/outlet Ø (mm)	Installation dimension l × b (mm)	Weight (kg)	Sludge trap (l)	Water and grease (l)	Grease storage (l)	Total (l)
225	235	50	891 × 420	5	12	21	8	33

Accessories

Inspection window

Art. no.

Inspection window

Compatibility: For grease separators *EasyClean free UnderSink* for free-standing installation

Inclusive: High-gloss polished inspection glass

Note: Installation in drillhole on site, use hole saw with DA60



913 110